


BES 516-324-G-S49-C  
BES01AU

PNP  
NO  
flush mountable

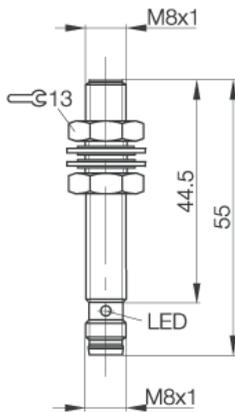

PX2012


**Electrical data:**

Time delay before availability	20 ms
Operating frequency (f)	1500 Hz
Voltage drop max. static	2,5 V
Connection	Connector S49 (M8)
Electrical type	DC
No-load supply current damped	9 mA
Switching element function	NO
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	PNP
Off-state current max (I <sub>r</sub> )	20 µA
Ripple max. of U <sub>e</sub>	= 15 %
Supply voltage max. (U <sub>b</sub> )	30 V
Supply voltage min. (U <sub>b</sub> )	10 V


**General data:**

Output indication	yes
Short circuit protected	yes
Protected against polarity reversal	yes
Degree of protection IP	IP68 per BWN Pr 20
Insulation class	2
Approval	CE,c_ul_us

**Wiring:**

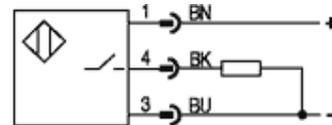

**Pinout:**



**Mechanical data:**

Number of Wires	3-wire
Mounting	flush mountable
Sensing face material	PA 12
Housing material	corrosion resistance Steel
Assured operating distance	0...1,6 mm
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Diameter	M8x1 mm
Repeat accuracy max. (R)	5 %
Rated operating distance (sn)	2 mm
Degree of pollution	3