

Main

Product or component type	Servo motor
Device short name	BSH
Maximum mechanical speed	8000 rpm
Continuous stall torque	<p>2.2 N.m for LXM32.D12N4 3 A at 400 V three phase</p> <p>2.2 N.m for LXM32.D12N4 3 A at 480 V three phase</p> <p>2.12 N.m for LXM05AD10M2 at 200...240 V single phase</p> <p>2.12 N.m for LXM05BD10M2 at 200...240 V single phase</p> <p>2.12 N.m for LXM05CD10M2 at 200...240 V single phase</p> <p>2.2 N.m for LXM15LD13M3 at 230 V single phase</p> <p>2.12 N.m for LXM05AD17M2 at 200...240 V single phase</p> <p>2.12 N.m for LXM05BD17M2 at 200...240 V single phase</p> <p>2.12 N.m for LXM05CD17M2 at 200...240 V single phase</p> <p>2.12 N.m for LXM05AD10M3X at 200...240 V three phase</p> <p>2.12 N.m for LXM05BD10M3X at 200...240 V three phase</p> <p>2.12 N.m for LXM05CD10M3X at 200...240 V three phase</p> <p>2.2 N.m for LXM15LD10N4 at 480 V three phase</p> <p>2.12 N.m for LXM05AD17M3X at 200...240 V three phase</p> <p>2.12 N.m for LXM05AD14N4 at 380...480 V three phase</p> <p>2.12 N.m for LXM05BD17M3X at 200...240 V three phase</p> <p>2.12 N.m for LXM05BD14N4 at 380...480 V three phase</p> <p>2.12 N.m for LXM05CD17M3X at 200...240 V three phase</p> <p>2.12 N.m for LXM05CD14N4 at 380...480 V three phase</p> <p>2.2 N.m for LXM15LD10N4 at 230 V three phase</p> <p>2.2 N.m for LXM15LD10N4 at 400 V three phase</p>
Peak stall torque	<p>7.6 N.m for LXM32.D12N4 3 A at 400 V three phase</p> <p>7.6 N.m for LXM32.D12N4 3 A at 480 V three phase</p> <p>5.63 N.m for LXM15LD13M3 at 230 V single phase</p> <p>4.57 N.m for LXM05AD10M2 at 200...240 V single phase</p> <p>5.63 N.m for LXM05AD17M2 at 200...240 V single phase</p> <p>4.57 N.m for LXM05BD10M2 at 200...240 V single phase</p> <p>5.63 N.m for LXM05BD17M2 at 200...240 V single phase</p> <p>4.57 N.m for LXM05CD10M2 at 200...240 V single phase</p> <p>5.63 N.m for LXM05CD17M2 at 200...240 V single phase</p> <p>4.85 N.m for LXM15LD10N4 at 230 V three phase</p> <p>4.85 N.m for LXM15LD10N4 at 400 V three phase</p> <p>4.85 N.m for LXM15LD10N4 at 480 V three phase</p> <p>4.57 N.m for LXM05AD10M3X at 200...240 V three phase</p> <p>5.63 N.m for LXM05AD17M3X at 200...240 V three phase</p>

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

	<p>5.63 N.m for LXM05AD14N4 at 380...480 V three phase 4.57 N.m for LXM05BD10M3X at 200...240 V three phase 5.63 N.m for LXM05BD17M3X at 200...240 V three phase 5.63 N.m for LXM05BD14N4 at 380...480 V three phase 4.57 N.m for LXM05CD10M3X at 200...240 V three phase 5.63 N.m for LXM05CD17M3X at 200...240 V three phase 5.63 N.m for LXM05CD14N4 at 380...480 V three phase</p>
Nominal output power	<p>850 W for LXM32.D12N4 3 A at 400 V three phase 850 W for LXM32.D12N4 3 A at 480 V three phase 597 W for LXM15LD13M3 at 230 V single phase 600 W for LXM05AD10M2 at 200...240 V single phase 600 W for LXM05AD17M2 at 200...240 V single phase 600 W for LXM05BD10M2 at 200...240 V single phase 600 W for LXM05BD17M2 at 200...240 V single phase 600 W for LXM05CD10M2 at 200...240 V single phase 600 W for LXM05CD17M2 at 200...240 V single phase 1000 W for LXM15LD10N4 at 400 V three phase 1300 W for LXM15LD10N4 at 480 V three phase 597 W for LXM15LD10N4 at 230 V three phase 600 W for LXM05AD10M3X at 200...240 V three phase 600 W for LXM05AD14N4 at 380...480 V three phase 600 W for LXM05AD17M3X at 200...240 V three phase 600 W for LXM05BD10M3X at 200...240 V three phase 600 W for LXM05BD14N4 at 380...480 V three phase 600 W for LXM05BD17M3X at 200...240 V three phase 600 W for LXM05CD10M3X at 200...240 V three phase 600 W for LXM05CD14N4 at 380...480 V three phase 600 W for LXM05CD17M3X at 200...240 V three phase</p>
Nominal torque	<p>1.64 N.m for LXM32.D12N4 3 A at 400 V three phase 1.64 N.m for LXM32.D12N4 3 A at 480 V three phase 1.9 N.m for LXM05AD10M2 at 200...240 V single phase 1.9 N.m for LXM05AD17M2 at 200...240 V single phase 1.9 N.m for LXM05BD10M2 at 200...240 V single phase 1.9 N.m for LXM05BD17M2 at 200...240 V single phase 1.9 N.m for LXM05CD10M2 at 200...240 V single phase 1.9 N.m for LXM05CD17M2 at 200...240 V single phase 1.9 N.m for LXM15LD13M3 at 230 V single phase 1.55 N.m for LXM15LD10N4 at 480 V three phase 1.65 N.m for LXM15LD10N4 at 400 V three phase 1.9 N.m for LXM05AD10M3X at 200...240 V three phase 1.9 N.m for LXM05AD14N4 at 380...480 V three phase 1.9 N.m for LXM05AD17M3X at 200...240 V three phase 1.9 N.m for LXM05BD10M3X at 200...240 V three phase 1.9 N.m for LXM05BD14N4 at 380...480 V three phase 1.9 N.m for LXM05BD17M3X at 200...240 V three phase 1.9 N.m for LXM05CD10M3X at 200...240 V three phase 1.9 N.m for LXM05CD14N4 at 380...480 V three phase 1.9 N.m for LXM05CD17M3X at 200...240 V three phase 1.9 N.m for LXM15LD10N4 at 230 V three phase</p>
Nominal speed	<p>5000 rpm for LXM32.D12N4 3 A at 400 V three phase 5000 rpm for LXM32.D12N4 3 A at 480 V three phase 3000 rpm for LXM05AD10M2 at 200...240 V single phase 3000 rpm for LXM05AD17M2 at 200...240 V single phase 3000 rpm for LXM05BD10M2 at 200...240 V single phase 3000 rpm for LXM05BD17M2 at 200...240 V single phase 3000 rpm for LXM05CD10M2 at 200...240 V single phase 3000 rpm for LXM05CD17M2 at 200...240 V single phase 3000 rpm for LXM15LD13M3 at 230 V single phase 3000 rpm for LXM05AD10M3X at 200...240 V three phase 3000 rpm for LXM05AD14N4 at 380...480 V three phase 3000 rpm for LXM05BD10M3X at 200...240 V three phase 3000 rpm for LXM05BD14N4 at 380...480 V three phase 3000 rpm for LXM05CD10M3X at 200...240 V three phase 3000 rpm for LXM05CD14N4 at 380...480 V three phase 3000 rpm for LXM05AD17M3X at 200...240 V three phase 3000 rpm for LXM05BD17M3X at 200...240 V three phase 3000 rpm for LXM05CD17M3X at 200...240 V three phase 8000 rpm for LXM15LD10N4 at 480 V three phase 3000 rpm for LXM15LD10N4 at 230 V three phase 6000 rpm for LXM15LD10N4 at 400 V three phase</p>
Product compatibility	<p>LXM05AD10M2 at 200...240 V single phase LXM05AD17M2 at 200...240 V single phase LXM05BD10M2 at 200...240 V single phase LXM05BD17M2 at 200...240 V single phase</p>

LXM05CD10M2 at 200...240 V single phase
 LXM05CD17M2 at 200...240 V single phase
 LXM15LD13M3 at 230 V single phase
 LXM05AD10M3X at 200...240 V three phase
 LXM05BD10M3X at 200...240 V three phase
 LXM05CD10M3X at 200...240 V three phase
 LXM05AD14N4 at 380...480 V three phase
 LXM05BD14N4 at 380...480 V three phase
 LXM05CD14N4 at 380...480 V three phase
 LXM15LD10N4 at 400 V three phase
 LXM05AD17M3X at 200...240 V three phase
 LXM05BD17M3X at 200...240 V three phase
 LXM05CD17M3X at 200...240 V three phase
 LXM32.D12N4 at 400 V three phase
 LXM32.D12N4 at 480 V three phase
 LXM15LD10N4 at 230 V three phase
 LXM15LD10N4 at 480 V three phase

Shaft end	Untapped
IP degree of protection	IP50 (standard)
Speed feedback resolution	131072 points/turn x 4096 turns
Holding brake	Without
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connectors

Complementary

Range compatibility	Lexium 05 Lexium 15 Lexium 32
[Us] rated supply voltage	480 V
Network number of phases	Three phase
Continuous stall current	2.9 A
Continuous power	1.51 W
Maximum current Irms	11.8 A for LXM05AD10M2 11.8 A for LXM05AD10M3X 11.8 A for LXM05AD14N4 11.8 A for LXM05AD17M2 11.8 A for LXM05AD17M3X 11.8 A for LXM05BD10M2 11.8 A for LXM05BD10M3X 11.8 A for LXM05BD14N4 11.8 A for LXM05BD17M2 11.8 A for LXM05BD17M3X 11.8 A for LXM05CD10M2 11.8 A for LXM05CD10M3X 11.8 A for LXM05CD14N4 11.8 A for LXM05CD17M2 11.8 A for LXM05CD17M3X 11.8 A for LXM15LD10N4 11.8 A for LXM15LD13M3 11.8 A for LXM32.D12N4
Maximum permanent current	11.8 A
Switching frequency	8 kHz
Second shaft	Without second shaft end
Shaft diameter	11 mm
Shaft length	23 mm
Feedback type	Multiturn SinCos Hiperface
Motor flange size	70 mm
Number of motor stacks	2
Torque constant	0.77 N.m/A at 120 °C
Back emf constant	48 V/krpm at 120 °C
Number of motor poles	6
Rotor inertia	0.41 kg.cm ²
Stator resistance	4.2 Ohm at 20 °C

Stator inductance	19 mH at 20 °C
Stator electrical time constant	4.52 ms at 20 °C
Maximum radial force Fr	390 N at 6000 rpm 410 N at 5000 rpm 450 N at 4000 rpm 490 N at 3000 rpm 560 N at 2000 rpm 710 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
Type of cooling	Natural convection
Length	187 mm
Centring collar diameter	60 mm
Centring collar depth	2.5 mm
Number of mounting holes	4
Mounting holes diameter	5.5 mm
Circle diameter of the mounting holes	82 mm
Product weight	2.89 kg

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0850 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Need no specific recycling operations

Contractual warranty

Warranty period	18 months
-----------------	-----------

Servo Motors Dimensions

Example with Straight Connectors

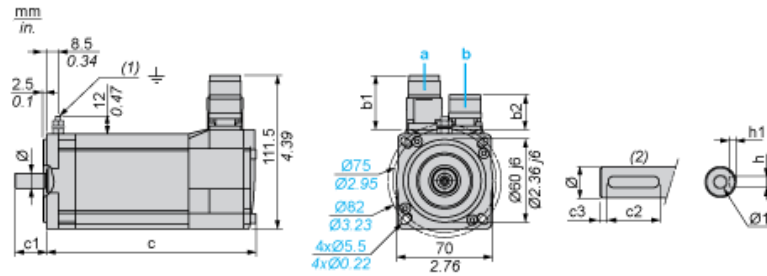

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight connectors		Rotatable angled		c (without brak	c (with brak	c1	c2	c3	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2									
39.5	25.5	39.5	39.5	187	213	23	18	2.5	4 N9	2.5 ^{+0.1} ₀	11 k6	M4 x 10


Dimensions in in.

Straight connecto		Rotatable angled		c (without br	c (with br	c1	c2	c3	h	h1	Ø	Ø1 for screws
b1	b2	b1	b2									
1.55	1.00	1.55	1.55	7.36	8.38	0.90	0.70	0.09	0.16 N9	0.01 ^{+0.004} ₀	0.43 k6	M4 x 0.39

400 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32-D12N4 servo drive

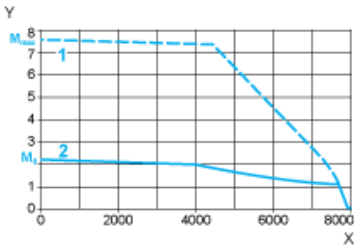


- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

480 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D12N4 servo drive

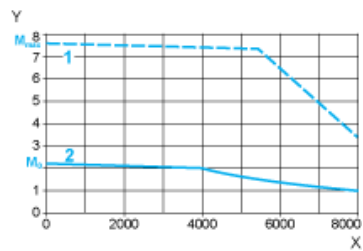

- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque