

Reflex Sensor with Background Suppression

HD11PA3

Part Number



- Adjustable switching distance
- Electronic background suppression
- Red light
- Stainless steel housing

Technical Data


Optical Data	
Range	120 mm
Adjustable Range	35...120 mm
Switching Hysteresis	< 5 %
Light Source	Red Light
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1



Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 30 mA
Switching Frequency	600 Hz
Response Time	833 μs
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III

Mechanical Data	
Adjustment	Potentiometer
Housing Material	Stainless Steel
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin

PNP NO/NC antivalent	●
Connection Diagram No.	101
Control Panel No.	D6
Suitable Connection Technology No.	2
Suitable Mounting Technology No.	150 160

These sensors detect distance by measuring angles. They are particularly good at recognizing objects in front of any background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

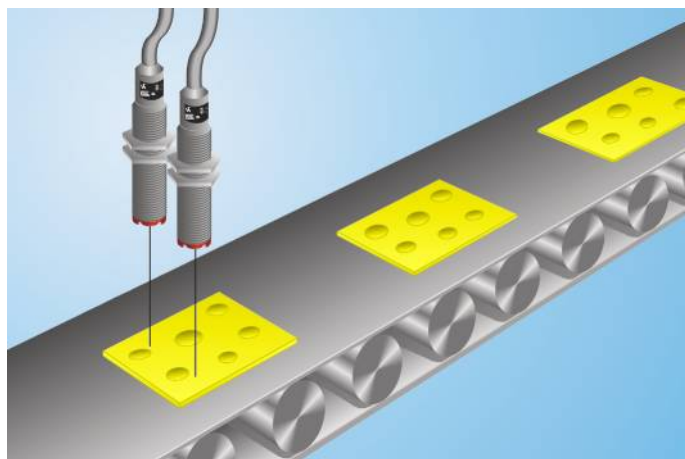

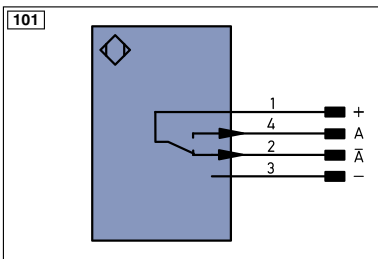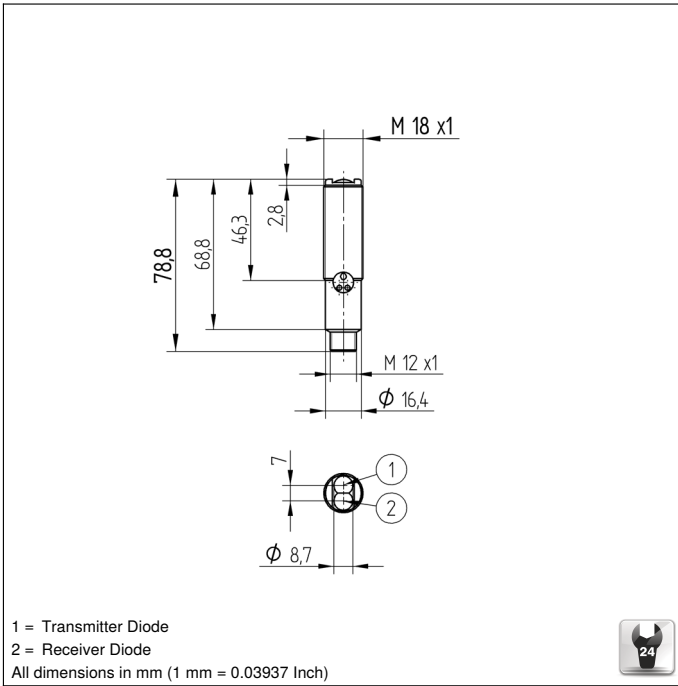

Legend		
+	Supply Voltage +	nc not connected
-	Supply Voltage 0 V	U Test Input
~	Supply Voltage (AC Voltage)	Ū Test Input inverted
A	Switching Output (NO)	W Trigger Input
A̅	Switching Output (NC)	O Analog Output
V	Contamination/Error Output (NO)	O- Ground for the Analog Output
V̅	Contamination/Error Output (NC)	BZ Block Discharge
E	Input (analog or digital)	AWV Valve Output
T	Teach Input	a Valve Control Output +
Z	Time Delay (activation)	b Valve Control Output 0 V
S	Shielding	SY Synchronization
RxD	Interface Receive Path	E+ Receiver-Line
TxD	Interface Send Path	S+ Emitter-Line
RDY	Ready	± Grounding
GND	Ground	S _n R Switching Distance Reduction
CL	Clock	Rx+/- Ethernet Receive Path
E/A	Output/Input programmable	Tx+/- Ethernet Send Path
	IO-Link	Bus Interfaces-Bus A(+)/B(-)
PoE	Power over Ethernet	La Emitted Light disengageable
IN	Safety Input	Mag Magnet activation
OSSD	Safety Output	RES Input confirmation
Signal	Signal Output	EDM Contactor Monitoring

Wire Colors according to DIN IEC 757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green Yellow


Table 1

Detection Range	60 mm	120 mm
Light Spot Diameter	2,5 mm	5 mm

Complementary Products

Dust extraction tube STAUBTUBUS-01


Ctrl. Panel



- 01 = Switching Status Indicator
- 02 = Contamination Warning
- 05 = Switching Distance Adjuster

Switching Distance Deviation

Typical characteristic curve based on Kodak white (90 % remission)

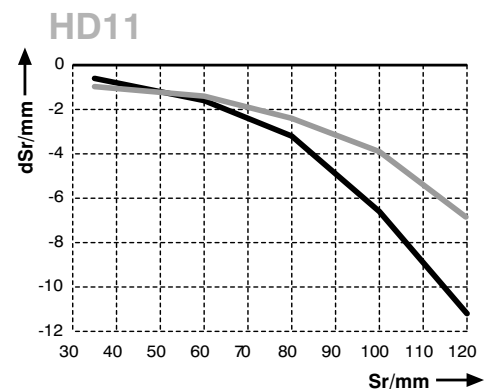

Sr = Switching Distance
 dSr = Switching Distance Change
 — black 6 % remission
 — grey 18 % remission